Technical Information Bulletin

SUBJECT ⟶ **PS8050 220vac Jumper Installation**

APPLIES TO: **PS8050** MODIFICATION SCHEDULE: **As Necessary** **DOCUMENT NO: 20433**

Summary: Since the PS8050 ships as a 110vac unit, machines installed in a 220vac environment have to be modified. This can be done easily using the extra 220vac jumper included with every unit.

Note: The operator-side panel must be removed to access the extra 220vac jumper. The jumper is taped to the back of the panel.

Procedure: To modify the PS8050 from 110vac to 220vac, use the following procedure.

1. Remove the operator-side cover.
2. Locate J5 (Line Voltage Select) on the MSTP board.
3. Replace the 110vac jumper with the 220vac jumper.
4. Reinstall cover.

Note: A 220vac power cord is not available from Riso, Inc. This should be outsourced.

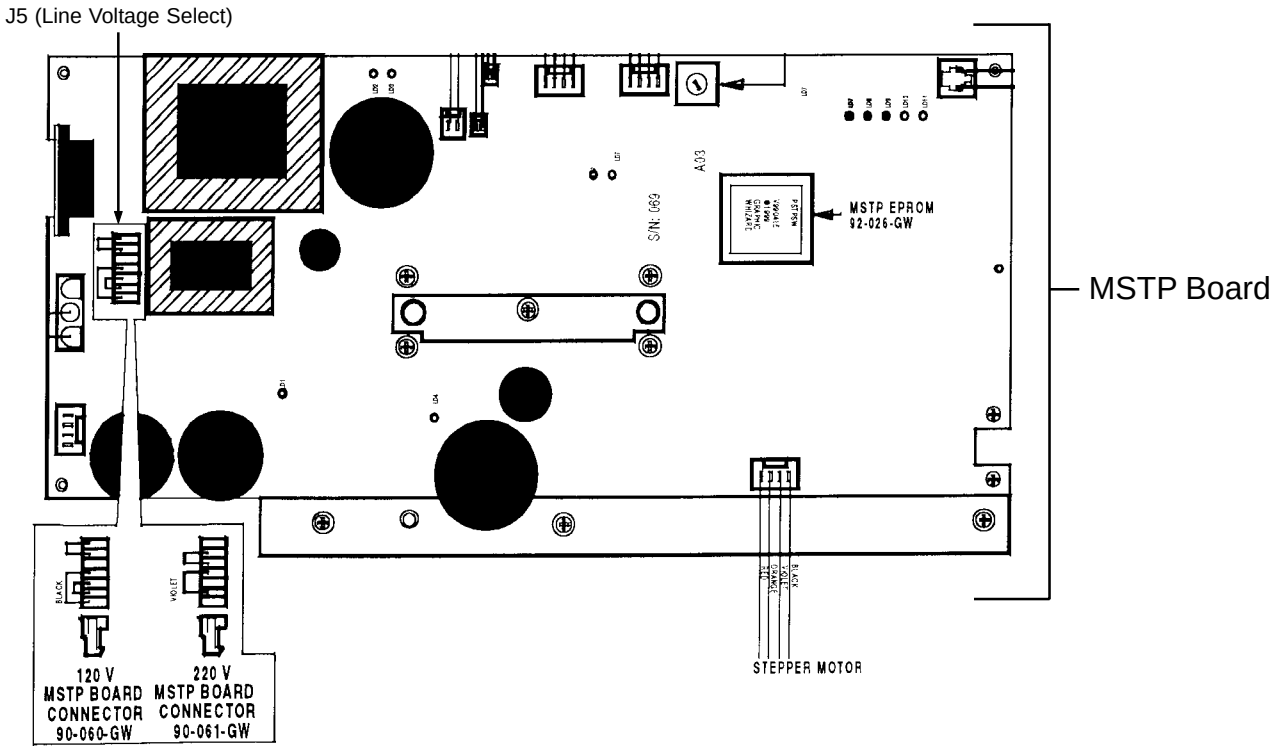

ISSUE DATE: **10/15/99** SUPERSEDES: DATED: PAGE: **1 of 1**

Copyright:1999 RISO, Inc. All products are trademarks of their respective companies. Specifications subject to change without notice.